


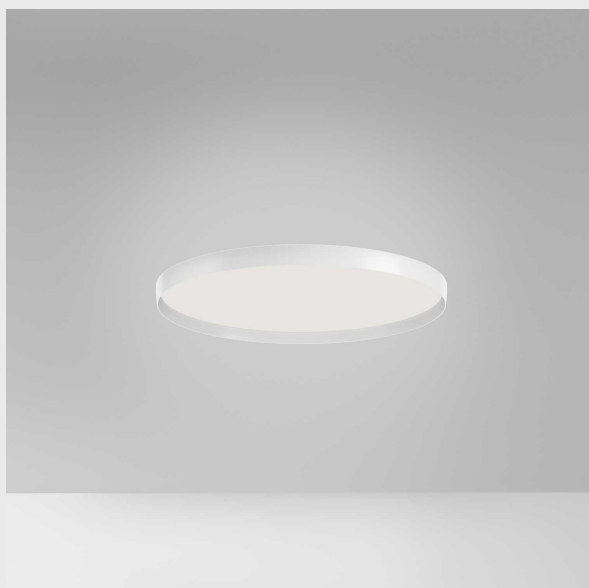

ACELIA P/M

FACPB2 - BIANCO - WHITE

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 40W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 2300-2400lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20

Insulation Class: I

Gross Weight: 5.20 Kg


Net Weight: 4.10 Kg

Montatura in alluminio satinato bianco. Diffusore in metacrilato bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).

Matt white aluminium mount. White opal methacrylate diffuser. Phase cut dimmable LED light source via external dimmer + push (not included).

Monture en aluminium satiné blanc. Diffuseur en méthacrylate blanc opale. Source lumineuse LED à gradation de phase via un variateur externe+poussoir (pas inclus).

Weißer satinierter Aluminiumrahmen. Opalweißer Methacrylat-Diffusor. Dimmbare LED-Lichtquelle mit Phasenanschnitt über externen Dimmer+Push (nicht enthalten).

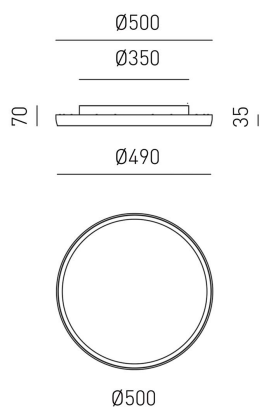



ACELIA P/M

FACPN2 - NERO - BLACK

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 40W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 2100-2200lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20

Insulation Class: I

Gross Weight: 5.20 Kg


Net Weight: 4.10 Kg

Montatura in alluminio satinato nero. Diffusore in metacrilato bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).

Matt black aluminium mount. White opal methacrylate diffuser. Phase cut dimmable LED light source via external dimmer + push (not included).

Monture en aluminium noir satiné. Diffuseur en méthacrylate blanc opale. Source lumineuse LED à gradation de phase via un variateur externe+poussoir (pas inclus).

Schwarzer satiniertes Aluminiumrahmen. Opalweißer Methacrylat-Diffusor. Dimmbare LED-Lichtquelle mit Phasenanschnitt über externen Dimmer+Push (nicht enthalten).

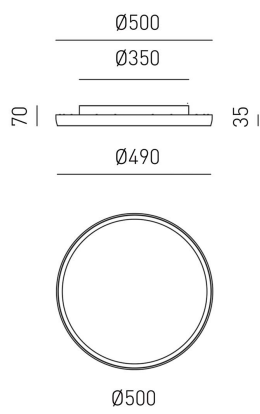



ACELIA P/M

FACPO2 - ORO - GOLD

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 40W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 2200-2300lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20

Insulation Class: I

Gross Weight: 5.20 Kg

Net Weight: 4.10 Kg

Montatura in alluminio oro spazzolato. Diffusore in metacrilato bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno+push (non inclusi).

Brushed gold -finish aluminium mount. White opal methacrylate diffuser. Phase cut dimmable LED light source via external dimmer + push (not included).

Monture en aluminium doré brossé. Diffuseur en méthacrylate blanc opale. Source lumineuse LED à gradation de phase via un variateur externe+poussoir (pas inclus).

Gebürsteter goldener Aluminiumrahmen. Opalweißer Methacrylat-Diffusor. Dimmbare LED-Lichtquelle mit Phasenanschnitt über externen Dimmer+Push (nicht enthalten).

