



AELA P/M

FAEPA2 - ARANCIO-BRUCIATO

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 50W+10W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 3100-3200lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20


Insulation Class: I

Energy Class: D

Volume: 0,0369m³

Gross Weight: 6.00 Kg

Net Weight: 4.40 Kg

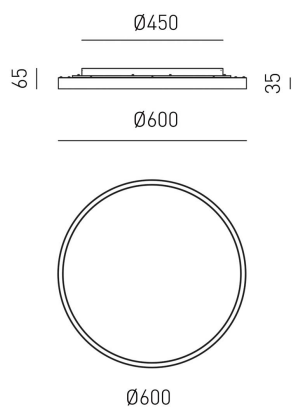



AELA P/M

FAEPBE2 - NEW-BEIGE

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 50W+10W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 3100-3200lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20


Insulation Class: I

Energy Class: D

Volume: 0,0369m³

Gross Weight: 6.00 Kg

Net Weight: 4.40 Kg

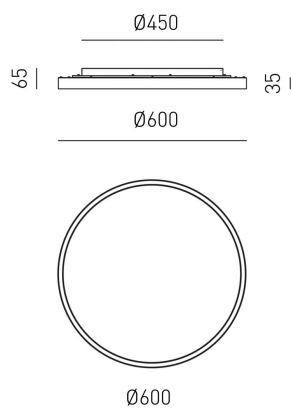



AELA P/M

FAEPP2 - PESCA

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 50W+10W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 3100-3200lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20


Insulation Class: I

Energy Class: D

Volume: 0,0369m³

Gross Weight: 6.00 Kg

Net Weight: 4.40 Kg

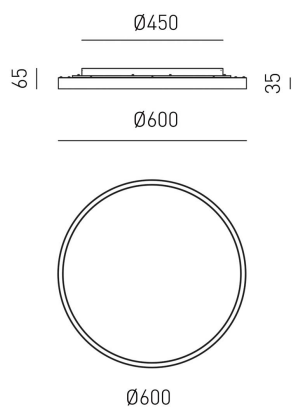



AELA P/M

FAEPB2 - BIANCO - WHITE

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 50W+10W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 3100-3200lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20


Insulation Class: I

Energy Class: D

Volume: 0,0369m³

Gross Weight: 6.00 Kg

Net Weight: 4.40 Kg

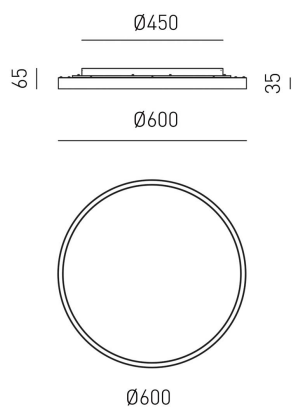



AELA P/M

FAEPN2 - NERO - BLACK

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 50W+10W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 3100-3200lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20


Insulation Class: I

Energy Class: D

Volume: 0,0369m³

Gross Weight: 6.00 Kg

Net Weight: 4.40 Kg

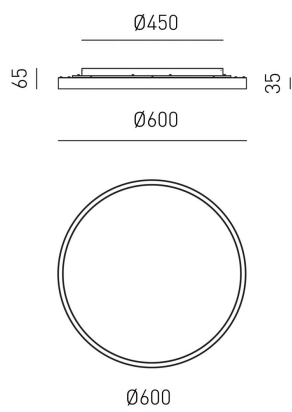



AELA P/M

FAEPO2 - ORO - GOLD

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led Integrato

Power: 50W+10W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 3100-3200lm

Color Temperature: 3000K-4000K

Light Beam: 120° _ Biemissione

CRI: >80

Lifespan: 30.000h

IP Rating: IP20

Insulation Class: I

Energy Class: D

Volume: 0,0369m³

Gross Weight: 6.00 Kg

Net Weight: 4.40 Kg

