


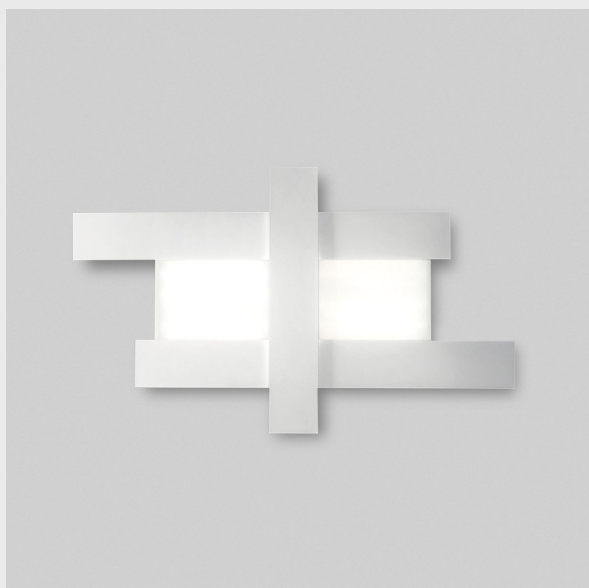

DOHA P/G

FDOPB3 - BIANCO - WHITE

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led integrato

Power: 50W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 4470lm

Color Temperature: 3000K

Light Beam: 120° _ Diretta

CRI: >80

Lifespan: 30.000h

IP Rating: IP20

Insulation Class: I

Gross Weight: 6.57 Kg


Net Weight: 5.14 Kg


Montatura in alluminio bianco. Diffusore in metacrilato bisatinato e alluminio con Flniture bianco. Sorgente luminosa led.

White aluminium frame. Diffuser in double-coated methacrylate and aluminium with white Flnish. Led light source.

Monture en aluminium blanc. Diffuseur biseauté en méthacrylate et aluminium, finition blanche. Source lumineuse LED.

Weißer Aluminiumrahmen. Abgeschrägter Diffusor aus Methacrylat und Aluminium mit weißer Oberfläche. LED-Lichtquelle.

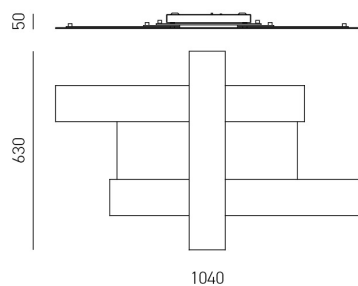

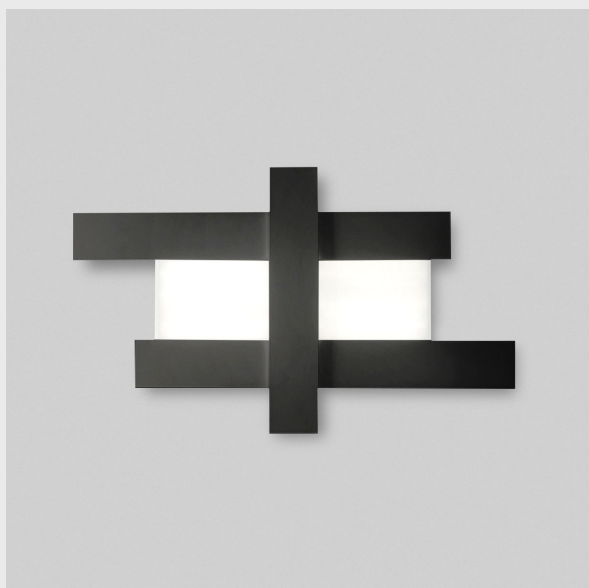

DOHA P/G

FDOPN3 - NERO - BLACK

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led integrato

Power: 50W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 4470lm

Color Temperature: 3000K

Light Beam: 120° _ Diretta

CRI: >80

Lifespan: 30.000h

IP Rating: IP20

Insulation Class: I

Gross Weight: 6.57 Kg


Net Weight: 5.14 Kg

Montatura in alluminio bianco. Diffusore in metacrilato bisatinato e alluminio con Flniture nero. Sorgente luminosa led.

White aluminium frame. Diffuser in double-coated methacrylate and aluminium with black Flnish. Led light source.

Monture en aluminium blanc. Diffuseur biseauté en méthacrylate et aluminium, finition noire. Source lumineuse LED.

Weißer Aluminiumrahmen. Abgeschrägter Diffusor aus Methacrylat und Aluminium mit schwarzer Oberfläche. LED-Lichtquelle.

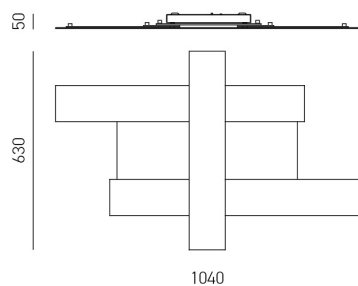



DOHA P/G

FDOPT3 - TORTORA - DOVE

TECHNICAL DATA

Installation: Interno _ Lampada a soffitto

Source: Led integrato

Power: 50W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 4470lm

Color Temperature: 3000K

Light Beam: 120° _ Diretta

CRI: >80

Lifespan: 30.000h

IP Rating: IP20

Insulation Class: I

Gross Weight: 6.57 Kg

Net Weight: 5.14 Kg

Montatura in alluminio bianco. Diffusore in metacrilato bisatinato e alluminio con Finiture tortora. Sorgente luminosa led.

White aluminium frame. Diffuser in double-coated methacrylate and aluminium with dove grey Finish. Led light source.

Monture en aluminium blanc. Diffuseur biseauté en méthacrylate et aluminium avec finition couleur tourterelle. Source lumineuse LED.

Weißer Aluminiumrahmen. Abgeschrägter Diffusor aus Methacrylat und Aluminium mit taubenfarbener Oberfläche. LED-Lichtquelle.

