



YOANA A/P

FYOAB1 - BIANCO - WHITE

TECHNICAL DATA

Installation: Interno _ Lampada a parete

Source: Led integrato

Power: 15W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 1500lm

Color Temperature: 3000K

Light Beam: 120° _ Indiretta

CRI: >80

Lifespan: 30.000h

IP Rating: IP20

Insulation Class: I

Gross Weight: 0.93 Kg


Net Weight: 0.89 Kg


Montatura in metallo bianco satinato. Diffusore in metacrilato bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno + push (non inclusi).

White metal satin frame. White opal methacrylate diffuser. Phase cut dimmable LED light source via external dimmer+push (not included).

Monture en métal blanc satiné. Diffuseur en méthacrylate blanc opale. Source lumineuse LED à gradation progressive via un gradateur externe + bouton-poussoir (pas inclus).

Satiniertes weißer Metallrahmen. Opalweißer Methacrylat-Diffusor. Dimmbare LED-Lichtquelle mit Phasenanschnitt über externen Dimmer + Push (nicht enthalten).



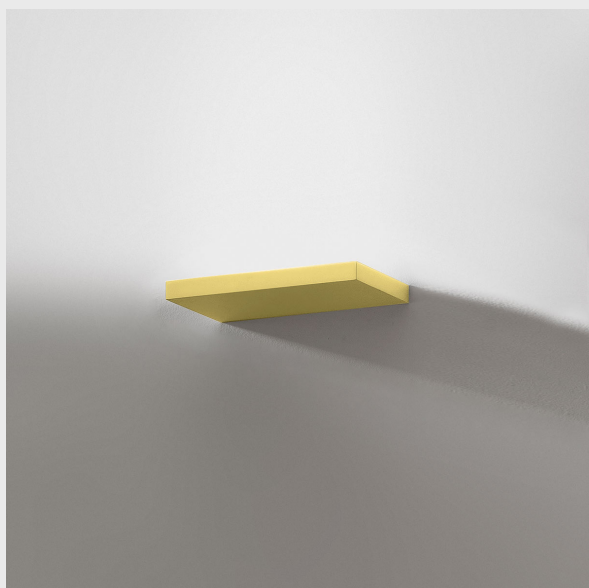

YOANA A/P

FYOA01 - OTTONE - BRASS

TECHNICAL DATA

Installation: Interno _ Lampada a parete

Source: Led integrato

Power: 15W

Power Supply: 220-240V AC _ 50/60Hz

Dimming: Dimmerabile _ taglio fase+push non incl.

Lumen: 1500lm

Color Temperature: 3000K

Light Beam: 120° _ Indiretta

CRI: >80

Lifespan: 30.000h

IP Rating: IP20

Insulation Class: I

Gross Weight: 0.93 Kg


Net Weight: 0.89 Kg

Montatura in metallo finitura ottone. Diffusore in metacrilato bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno + push (non inclusi).

Brass metal frame. White opal methacrylate diffuser. Phase cut dimmable LED light source via external dimmer+push (not included).

Monture en métal finition laiton. Diffuseur en méthacrylate blanc opale. Source lumineuse LED à gradation progressive via un gradateur externe + bouton-poussoir (pas inclus).

Messingfarbene Metallfassung. Opalweißer Methacrylat-Diffusor. Dimmbare LED-Lichtquelle mit Phasenanschnitt über externen Dimmer + Push (nicht enthalten).





YOANA A/P

FYOAT1 - TITANIO - TITANIUM

TECHNICAL DATA

Installation: Interno _ Lampada a parete
Source: Led integrato
Power: 15W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ taglio fase+push non incl.
Lumen: 1500lm
Color Temperature: 3000K
Light Beam: 120° _ Indiretta
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Gross Weight: 0.93 Kg
Net Weight: 0.89 Kg

Montatura in metallo finitura titanio. Diffusore in metacrilato bianco opale. Sorgente luminosa led dimmerabile a taglio di fase tramite dimmer esterno + push (non inclusi).

Titanium metal frame. White opal methacrylate diffuser. Phase cut dimmable LED light source via external dimmer+push (not included).

Monture en métal finition titane. Diffuseur en méthacrylate blanc opale. Source lumineuse LED à gradation progressive via un gradateur externe + bouton-poussoir (pas inclus).

Messingfarbene Metallfassung. Opalweißer Methacrylat-Diffusor. Dimmbare LED-Lichtquelle mit Phasenanschnitt über externen Dimmer + Push (nicht enthalten).

