


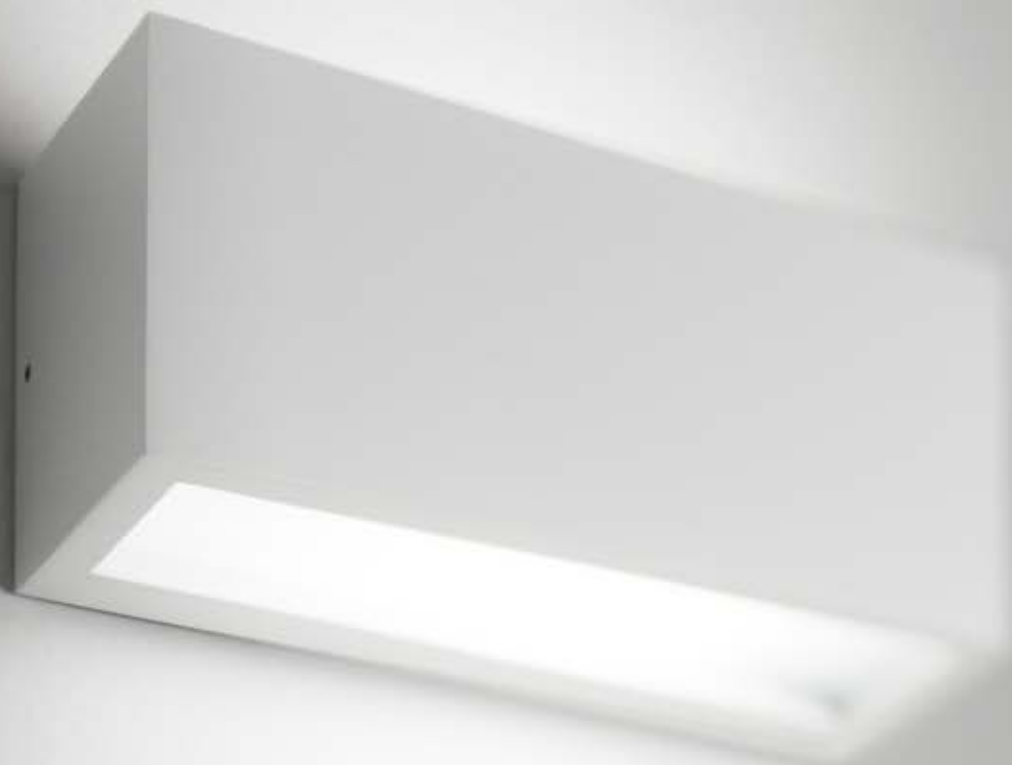


MÉTRO

_Lampada da parete in alluminio, montaggio in aderenza a parete tramite supporto in metallo.

_Aluminum wall lamp, installation surface mount with metal bracket.

finitura finish	vernice epossidica epoxy varnish
sorgente luminosa light source	LED SMD San'an Optoelectronics luce diretta direct lighting
potenza nominale reference power	24W
diffusore in PMMA modulo LED sostituibile - driver incluso PMMA light diffuser replaceable LED - driver included	
CE IP54	



finitura finish	vernice epossidica epoxy varnish
lampada lamp	1 x E27 max 20W LED 1 x R7S max 20W LED luce diretta direct lighting
compatibile con lampadine di classe da A a G compatible with lightbulbs from A to G classes	
il dispositivo è privo di lampadina light bulb not included	
CE IP54	



546-19

finitura
finishsorgente luminosa
light sourcebianco sabbiato
sanded white

3000K 1130lm*

546-19N

bianco sabbiato
sanded white

4000K 1130lm*

533

bianco sabbiato
sanded white1xE27
max 20W LED

533L

bianco sabbiato
sanded white1xR7S
max 20W LED

547-19

antracite sabbiato
sanded dark gray

3000K 1130lm*

547-19N


antracite sabbiato
sanded dark gray

4000K 1130lm*

534

antracite sabbiato
sanded dark gray1xE27
max 20W LED

534L

antracite sabbiato
sanded dark gray1xR7S
max 20W LED

548-19

corten sabbiato
sanded corten

3000K 1130lm*

548-19N

corten sabbiato
sanded corten

4000K 1130lm*

535

corten sabbiato
sanded corten1xE27
max 20W LED

535L

corten sabbiato
sanded corten1xR7S
max 20W LED

529

nero sabbiato
sanded black1xE27
max 20W LED

* valore riferito alla sorgente luminosa
value relevant to the light source